



SUNRISE (HK) INTERNATIONAL CORP LTD

SUNRISE as a Full-International Foreign company. Supply our LED products with high efficiency lumens, 5 years warranty quality, to enhance business development, highly request our team owning open mind and international ideas. Everyone can realize our positive working atmosphere, keep a good relationship with customers and develop together with sunrise



LED PROFESSIONAL DEVELOPMENT SINCE 2005



OFFICE

Room 2705AB Seg Plaza,
HuaQiang Road, Futian
District, Shenzhen, China

FACTORY

6F Building A.NO.1 TianYang
Er Rd. Datianyang SongGang
Bao An District.



SUNRISE (HK) INTERNATIONAL CORP LTD

SUNRISE as a Full-International Foreign company. Supply our LED products with high efficiency lumens, 5 years warranty quality, to enhance business development, highly request our team owning open mind and international ideas. Everyone can realize our positive working atmosphere, keep a good relationship with customers and develop together with sunrise



LED PROFESSIONAL DEVELOPMENT SINCE 2005



OFFICE

Room 2705AB Seg Plaza,
HuaQiang Road, Futian
District, Shenzhen, China

FACTORY

6F Building A.NO.1 TianYang
Er Rd. Datianyang SongGang
Bao An District.



SUNRISE (HK) INTERNATIONAL CORP LTD



SUNRISE Company mainly works on developing and marketing the LED Street Light, Tunnel Light, High Bay Light, Wall Washer Light, Waterproof Light, Par Light, Downlight, Bulb Light, Tube Light, Track Spot Light, Panel Light, etc. Since the date of establishment.

SUNRISE has been committed to energy-saving promotion and environmental protection, and we passed CE, UL, ROHS, TUV, NTC, NOM, IRAM certifications. Our management system and the business mode continuously hold competitive position in the industry.

Our factory is located in Shenzhen, we control and self-owned the key process of the manufacturing which including SMT, driver production, tube line, downlight line, street light line, etc. It is our mutual success to make the warranted qualified products, join us and to be partner with us, great idea will be born out, and surprise be around you.

Our Mission

To give prompt and top quality service from all of our staff to our valued customers

Our Enterprise Spirit

Our dedicated staff are united in our goals to always improve professional knowledge and being rewarded for efforts in achieving these goals

Shared Values

Employees and management to be proud of our success and sharing our common goals

Quality Policy

To provide top quality products that are fully tested, we promise to constant committed to energy-saving promotion and environmental protection



Assemble Workshop



Assemble Line



Insert Line



Aging



Aging



Lobby



Culture Wall



Meeting Room



Office



Assemble Workshop



Assemble Line



Insert Line



Aging



Aging



Lobby



Culture Wall



Meeting Room



Office

CONTENT

LED SERIES 2016 Catalogue

LED bulb



LED bulb 01-05



LED candle 06-07



LED spot light 08-09



LED corn light 10-11




LED PAR & AR111 light 12



LED R light 13



Luminous Intensity Distribution Diagram

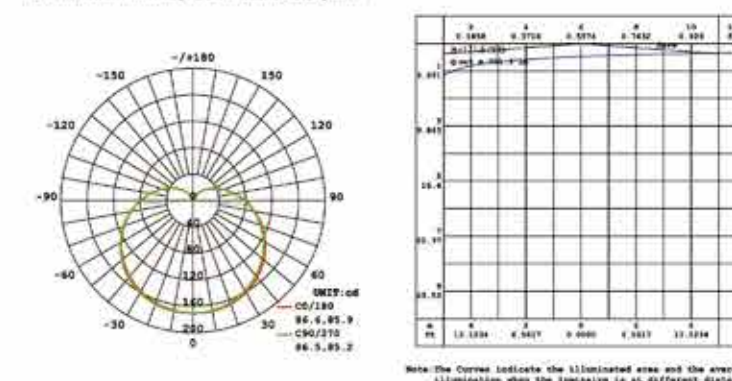


Feature

- Wide range of input voltage and frequency
- Constant current and non-isolated driver
- Small size, high power factor and conversion efficiency
- Advanced LED thermal managing, low brightness attenuation
- No flickering, no startup delay, also energy saving more than 60% than conventional lamp
- Modular structure, easy to maintain and replace
- No mercury, no UV, accord with RoHS standard, 100% recyclable
- Green lighting, environment-friendly
- Brightness decay <2% at 3000 hours
- Temp -15° to 50° & humidity 20% to 80%
- Aluminium body inside, excellent heat dissipation





Items	Materials	Voltage	Lumen	Dimension (MM)(DxH)
BL6060283505-H04	Plastic with Aluminum inside	175-250V	420Lm	60x108
BL6060283506-H04	Plastic with Aluminum inside	175-250V	480Lm	60x108
BL6060283507-H04	Plastic with Aluminum inside	175-250V	560Lm	60x108
BL6060283508-H04	Plastic with Aluminum inside	175-250V	640Lm	60x118
BL6060283509-H04	Plastic with Aluminum inside	175-250V	720Lm	60x118
BL6060283510-H04	Plastic with Aluminum inside	175-250V	930Lm	60x118

LED bulb

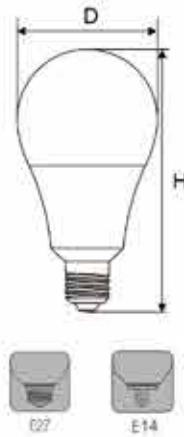

Luminous Intensity Distribution Diagram

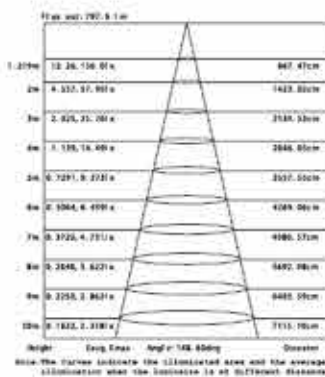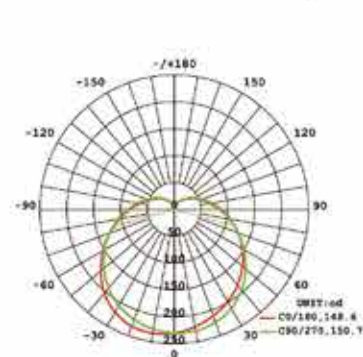


Feature

- Wide range of input voltage and frequency
- Constant current and non-isolated driver
- Small size, high power factor and conversion efficiency
- Advanced LED thermal managing, low brightness attenuation
- No flickering, no startup delay, also energy saving more than 60% than conventional lamp
- Modular structure, easy to maintain and replace
- No mercury, no UV, accord with RoHS standard, 100% recyclable
- Green lighting, environment-friendly
- Brightness decay <2% at 3000hours
- Temp -15° to 50° & humidity 20% to 80%
- Aluminium body inside, excellent heat Dissipation





Items	Materials	Voltage	Lumen	Dimension (MM)(DxH)
BL6060283505-H04-220	Plastic with Aluminum inside	220-240V	400Lm	60x108
BL6060283507-H07-220	Plastic with Aluminum inside	220-240V	500Lm	60x108
BL6060283510-H10-220	Plastic with Aluminum inside	220-240V	806Lm	60x108

LED bulb

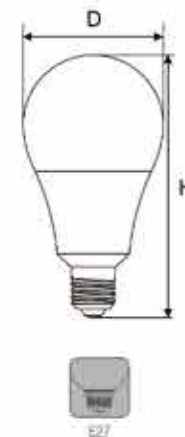

Luminous Intensity Distribution Diagram

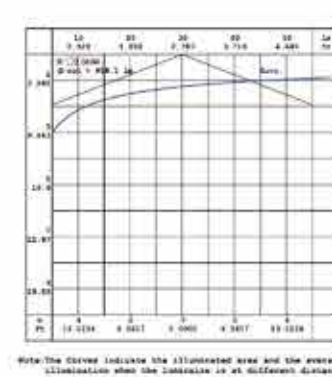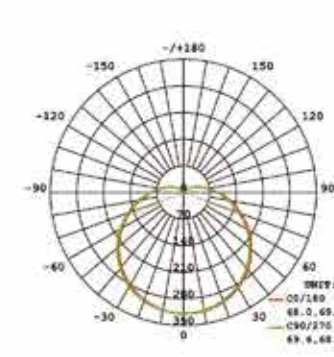


Feature

- Wide range of input voltage and frequency
- Constant current and non-isolated driver
- Small size, high power factor and conversion efficiency
- Advanced LED thermal managing, low brightness attenuation
- No flickering, no startup delay, also energy saving more than 60% than conventional lamp
- Modular structure, easy to maintain and replace
- No mercury, no UV, accord with RoHS standard, 100% recyclable
- Green lighting, environment-friendly
- Brightness decay <2% at 3000hours
- Temp -15° to 50° & humidity 20% to 80%
- Aluminium body inside, excellent heat dissipation




Items	Materials	Voltage	Lumen	Dimension (MM)(DxH)
BL6060283512-H07	Plastic with Aluminum inside	175-250V	1055Lm	60x120
BL6060283515-H07	Plastic with Aluminum inside	175-250V	1250Lm	60x120
BL6060283516-H07	Plastic with Aluminum inside	175-250V	1500Lm	80x135
BL6060283518-H07	Plastic with Aluminum inside	175-250V	1700Lm	80x135
BL6060283524-H07	Plastic with Aluminum inside	175-250V	2000Lm	95x158
BL6060283524-H07	Plastic with Aluminum inside	175-250V	2800Lm	120x188

LED bulb

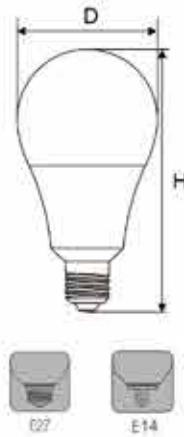

Luminous Intensity Distribution Diagram

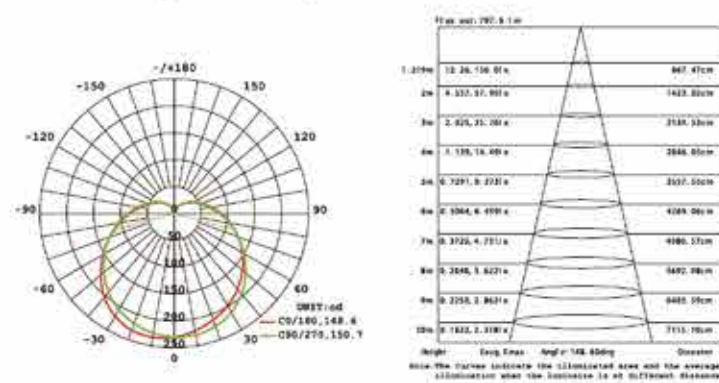

Feature

- Wide range of input voltage and frequency
- Constant current and non-isolated driver
- Small size, high power factor and conversion efficiency
- Advanced LED thermal managing, low brightness attenuation
- No flickering, no startup delay, also energy saving more than 60% than conventional lamp
- Modular structure, easy to maintain and replace
- No mercury, no UV, accord with RoHS standard, 100% recyclable
- Green lighting, environment-friendly
- Brightness decay <2% at 3000hours
- Temp -15° to 50° & humidity 20% to 80%
- Aluminium body inside, excellent heat Dissipation




Items	Materials	Voltage	Lumen	Dimension (MM)(DxH)
BL6060283505-H04-220	Plastic with Aluminum inside	220-240V	400Lm	60x108
BL6060283507-H07-220	Plastic with Aluminum inside	220-240V	500Lm	60x108
BL6060283510-H10-220	Plastic with Aluminum inside	220-240V	806Lm	60x108

LED bulb



Luminous Intensity Distribution Diagram

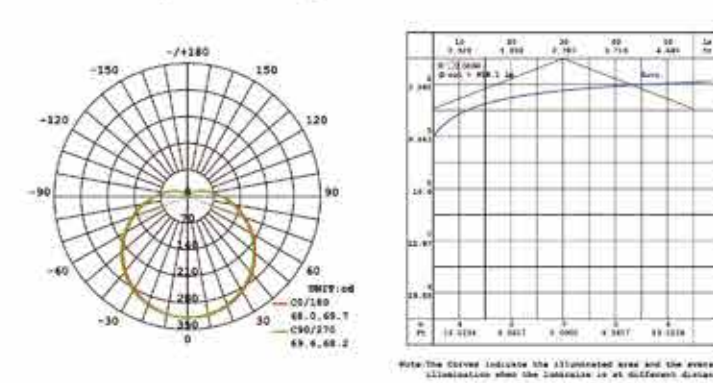

Feature

- Wide range of input voltage and frequency
- Constant current and non-isolated driver
- Small size, high power factor and conversion efficiency
- Advanced LED thermal managing, low brightness attenuation
- No flickering, no startup delay, also energy saving more than 60% than conventional lamp
- Modular structure, easy to maintain and replace
- No mercury, no UV, accord with RoHS standard, 100% recyclable
- Green lighting, environment-friendly
- Brightness decay <2% at 3000hours
- Temp -15° to 50° & humidity 20% to 80%
- Aluminium body inside, excellent heat dissipation





Items	Materials	Voltage	Lumen	Dimension (MM)(DxH)
BL6060283512-H07	Plastic with Aluminum inside	175-250V	1055Lm	60x120
BL6060283515-H07	Plastic with Aluminum inside	175-250V	1250Lm	60x120
BL6060283516-H07	Plastic with Aluminum inside	175-250V	1500Lm	80x135
BL6060283518-H07	Plastic with Aluminum inside	175-250V	1700Lm	80x135
BL6060283524-H07	Plastic with Aluminum inside	175-250V	2000Lm	95x158
BL6060283524-H07	Plastic with Aluminum inside	175-250V	2800Lm	120x188

LED corn light



Luminous-Intensity Distribution Diagram



Feature

- High lumens, high transmission of light, strong resistant of corrosion, very safe
- Reliable quality, 2 years warranty and 35,000 hours lifespan or more than that
- Constant current driver ensures the stability, no flashing
- Full ambient light without a dark place





Items	Materials	Voltage	Lumen	Dimension (MM)(DxH)
	PBT+glass	AC100-240V	300LM	38x108
	PBT+glass	AC100-240V	500LM	38x118
	PBT+glass	AC100-240V	500LM	41x120
	PBT+glass	AC100-240V	700LM	41x130
	PBT+glass	AC100-240V	900LM	41x140
	PBT+glass	AC100-240V	1200LM	47x146
	PBT+glass	AC100-240V	1600LM	58x195
	PBT+glass	AC100-240V	2000LM	58x195
	PBT+glass	AC100-240V	2400LM	72x225
	PBT+glass	AC100-240V	3500LM	88x265

LED corn light



Luminous-Intensity Distribution Diagram



Feature

- High lumens, high transmission of light, strong resistant of corrosion, very safe
- Reliable quality, 2 years warranty and 35,000 hours lifespan or more than that
- Constant current driver ensures the stability, no flashing
- Full ambient light without a dark place




Items	Materials	Voltage	Lumen	Dimension (MM)(DxH)
	PBT+glass	AC100-240V	450LM	49x125
	PBT+glass	AC100-240V	530LM	49x135
	PBT+glass	AC100-240V	810LM	60x140
	PBT+glass	AC100-240V	1080LM	60x155
	PBT+glass	AC100-240V	2160LM	75x233

LED bulb



Luminous Intensity Distribution Diagram

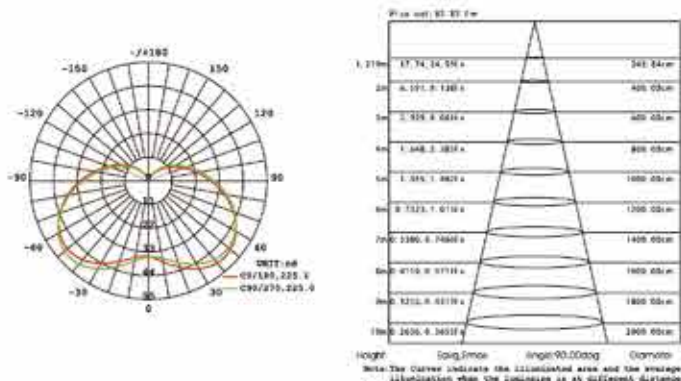

Feature

- Wide range of input voltage and frequency
- Constant current and non-isolated driver
- Small size, high power factor and conversion efficiency
- Advanced LED thermal managing, low brightness attenuation
- No flickering, no startup delay, also energy saving more than 60% than conventional lamp
- Modular structure, easy to maintain and replace
- No mercury, no UV, accord with RoHS standard, 100% recyclable
- Green lighting, environment-friendly
- Brightness decay <2% at 3000 hours
- Temp -15° to 50° & humidity 20% to 80%
- Aluminium body inside, excellent heat dissipation




Items	Materials	Voltage	Lumen	Dimension (MM)(DxH)
BL4560283503-H04	Plastic with Aluminum inside	175-250V	200Lm	45x78
BL4560283504-H04	Plastic with Aluminum inside	175-250V	320Lm	45x78
BL4560283505-H04	Plastic with Aluminum inside	175-250V	400Lm	45x78
BL4560283506-H04	Plastic with Aluminum inside	175-250V	480Lm	45x78
BL4560283507-H04	Plastic with Aluminum inside	175-250V	520Lm	45x78
BL4560283508-H04	Plastic with Aluminum inside	175-250V	640Lm	45x88

LED emergency bulb



Luminous Intensity Distribution Diagram

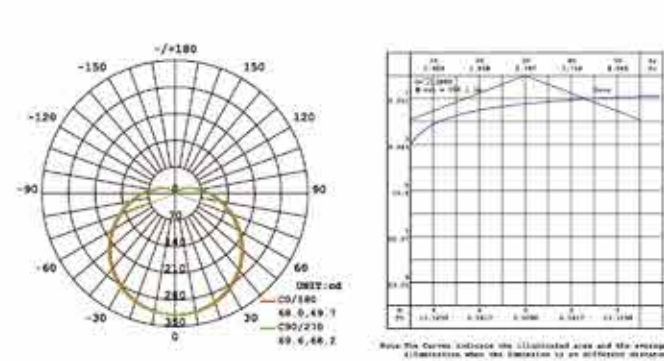

Feature

- High lumen, portable, rechargeable emergency LED bulb with built-in battery
- Energy saving, eco-friendly
- More than 90% light transmittance
- Ventilation design, high efficient heat dissipation
- Easy to install and use
- Emergency time up to 3 hours




Items	Materials	Cover	Voltage	Lumen	Dimension (MM)(DxH)
BL1260283536-H11	PC	PC	175-250V	2900Lm	120x185
BL1560283560-H11	PC	PC	175-250V	4000Lm	150x195

LED candle




TP-C37ZY-S

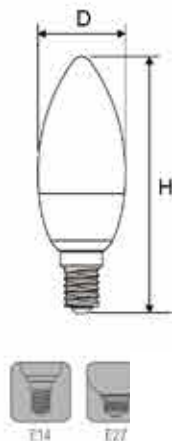

TP-C37ZY-F




Luminous Intensity Distribution Diagram

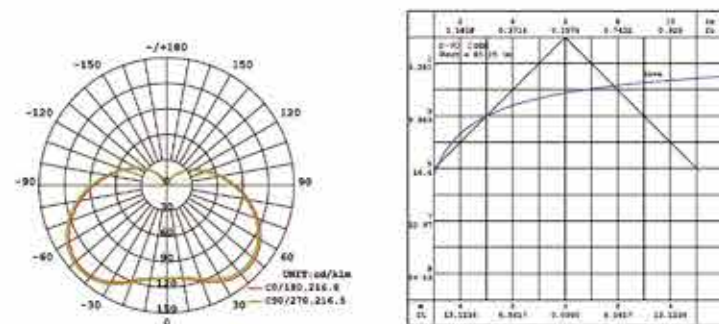

Note: The Curves indicate the illuminated area and the average illumination when the beam is at different angles.

Feature

- Wide range of input voltage and frequency
- Constant current and non-isolated driver
- Small size, high power factor and conversion efficiency
- Advanced LED thermal managing, low brightness attenuation
- No flickering, no startup delay, also energy saving more than 60% than conventional lamp
- Modular structure, easy to maintain and replace
- No mercury, no UV, accord with RoHS standard, 100% recyclable
- Green lighting, environment-friendly
- Brightness decay <2% at 3000 hours
- Temp -15° to 50° & humidity 20% to 80%
- Aluminium body inside, excellent heat dissipation




Items	Materials	Voltage	Lumen	Dimension (MM(DxH))
BL3760283503-H14	Plastic with Aluminum inside	AC175-250V	200Lm	37x98
BL3760283504-H14	Plastic with Aluminum inside	AC175-250V	320Lm	37x98
BL3760283505-H14	Plastic with Aluminum inside	AC175-250V	400Lm	37x98
BL3760283506-H14	Plastic with Aluminum inside	AC175-250V	480Lm	37x98
BL3760283507-H14	Plastic with Aluminum inside	AC175-250V	520Lm	37x98
BL3760283508-H14	Plastic with Aluminum inside	AC175-250V	640Lm	37x106

LED candle




TP-F37-S

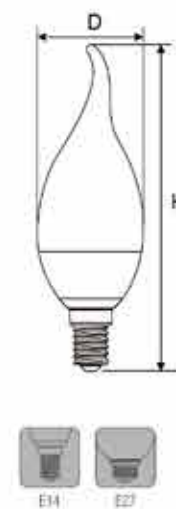

TP-F37-F



Luminous Intensity Distribution Diagram

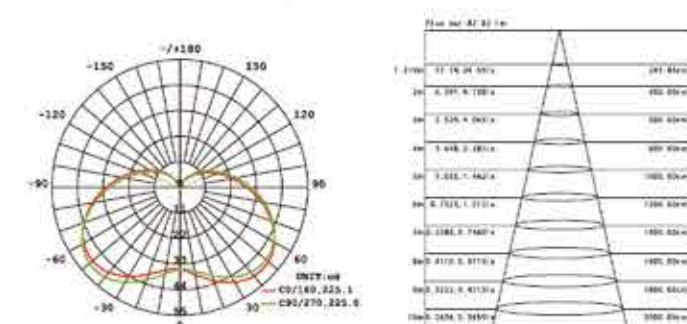

Note: The Curves indicate the illuminated area and the average illumination when the beam is at different angles.

Feature

- Wide range of input voltage and frequency
- Constant current and non-isolated driver
- Small size, high power factor and conversion efficiency
- Advanced LED thermal managing, low brightness attenuation
- No flickering, no startup delay, also energy saving more than 60% than conventional lamp
- Modular structure, easy to maintain and replace
- No mercury, no UV, accord with RoHS standard, 100% recyclable
- Green lighting, environment-friendly
- Brightness decay <2% at 3000 hours
- Temp -15° to 50° & humidity 20% to 80%
- Aluminium body inside, excellent heat dissipation




Items	Materials	Voltage	Lumen	Dimension (MM(DxH))
BL3760283503-H19	Plastic with Aluminum inside	AC175-250V	200Lm	37x98
BL3760283504-H19	Plastic with Aluminum inside	AC175-250V	320Lm	37x98
BL3760283505-H19	Plastic with Aluminum inside	AC175-250V	400Lm	37x98
BL3760283506-H19	Plastic with Aluminum inside	AC175-250V	480Lm	37x98
BL3760283507-H19	Plastic with Aluminum inside	AC175-250V	520Lm	37x98
BL3760283508-H19	Plastic with Aluminum inside	AC175-250V	640Lm	37x106

LED spot light



Luminous Intensity Distribution Diagram

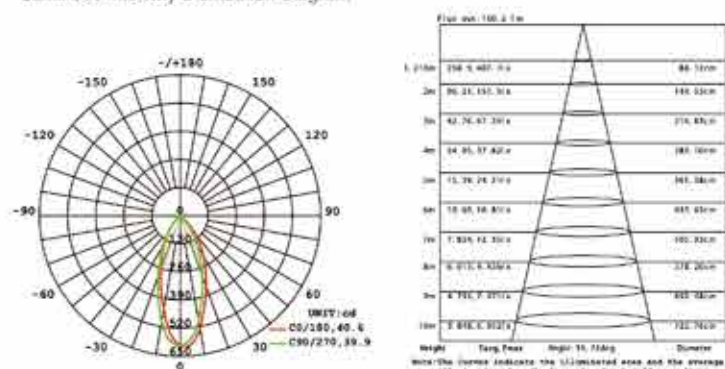

Feature

- Wide range of input voltage and frequency
- Constant current and non-isolated driver
- Small size, high power factor and conversion efficiency
- Advanced LED thermal managing, low brightness attenuation
- No flickering, no startup delay, also energy saving more than 60% than conventional lamp
- Modular structure, easy to maintain and replace
- No mercury, no UV, accord with RoHS standard, 100% recyclable
- Green lighting, environment-friendly
- Brightness decay <2% at 3000 hours
- Temp -15° to 50° & humidity 20% to 80%
- Aluminium body inside, excellent heat dissipation




Items	Materials	Voltage	Lumen	Dimension (MM)(DxH)
	Plastic with Aluminium inside	AC100-240V	270LM	50x54
	Plastic with Aluminium inside	AC100-240V	450LM	50x54
	Plastic with Aluminium inside	AC100-240V	540LM	50x54
	Plastic with Aluminium inside	AC/DC12V	270LM	50x54
	Plastic with Aluminium inside	AC/DC12V	450LM	50x54
	Plastic with Aluminium inside	AC/DC12V	540LM	50x54

LED spot light



Luminous Intensity Distribution Diagram

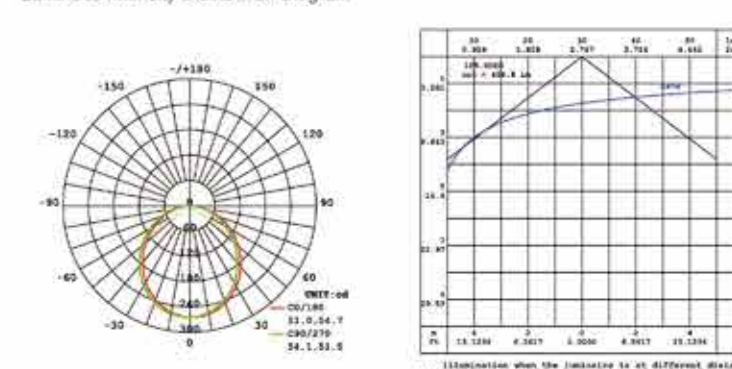

Feature

- Wide range of input voltage and frequency
- Constant current and non-isolated driver
- Small size, high power factor and conversion efficiency
- Advanced LED thermal managing, low brightness attenuation
- No flickering, no startup delay, also energy saving more than 60% than conventional lamp
- Modular structure, easy to maintain and replace
- No mercury, no UV, accord with RoHS standard, 100% recyclable
- Green lighting, environment-friendly
- Brightness decay <2% at 3000 hours
- Temp -15° to 50° & humidity 20% to 80%
- Aluminium body inside, excellent heat dissipation




Items	Materials	Voltage	Lumen	Dimension (MM)(DxH)
	Plastic	AC100-240V	270LM	50x57
	Plastic with Aluminium inside	AC100-240V	400LM	50x57
	Plastic with Aluminium inside	AC100-240V	630LM	50x57

LED PAR light



Feature

- Wide range of input voltage and frequency
- Constant current and non-isolated driver
- Small size, high power factor and conversion efficiency
- Advanced LED thermal managing, low brightness attenuation
- No flickering, no startup delay, also energy saving more than 60% than conventional lamp
- Modular structure, easy to maintain and replace
- No mercury, no UV, accord with RoHS standard, 100% recyclable
- Green lighting, environment-friendly
- Brightness decay <2% at 3000 hours
- Temp -15° to 50° & humidity 20% to 80%
- Aluminium body inside, excellent heat dissipation

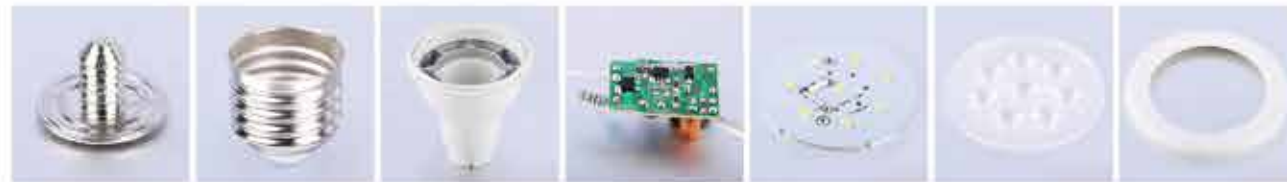

Items	Materials	Voltage	Lumen	Dimension (MM)(DxH)
BLP20283508-H15	Plastic with Aluminum inside	175-250V	640Lm	65x85
BLP20283512-H15	Plastic with Aluminum inside	175-250V	960Lm	98x100
BLP20283518-H15	Plastic with Aluminum inside	175-250V	1450Lm	122x128

LED global light



Feature

- Wide range of input voltage and frequency
- Constant current and non-isolated driver
- Small size, high power factor and conversion efficiency
- Advanced LED thermal managing, low brightness attenuation
- No flickering, no startup delay, also energy saving more than 60% than conventional lamp
- Modular structure, easy to maintain and replace
- No mercury, no UV, accord with RoHS standard, 100% recyclable
- Green lighting, environment-friendly
- Brightness decay <2% at 3000 hours
- Temp -15° to 50° & humidity 20% to 80%
- Aluminium body inside, excellent heat dissipation




Items	Materials	Cover	Voltage	Lumen	Dimension (MM)(DxH)
BL9560283512-H10	Plastic with Aluminum inside	PC	175-250V	980Lm	95x106
BL95602835-H10	Plastic with Aluminum inside	PC	175-250V	1250Lm	120x106
BL9560283525-H10	Plastic with Aluminum inside	PC	175-250V	2000Lm	150x106

LED R light



Luminous Intensity Distribution Diagram

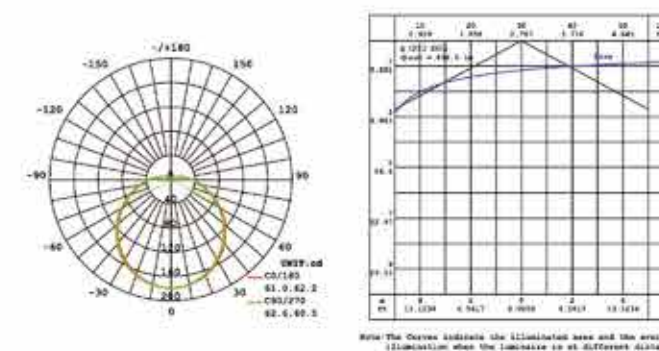

Feature

- Wide range of input voltage and frequency
- Constant current and non-isolated driver
- Small size, high power factor and conversion efficiency
- Advanced LED thermal managing, low brightness attenuation
- No flickering, no startup delay, also energy saving more than 60% than conventional lamp
- Modular structure, easy to maintain and replace
- No mercury, no UV, accord with RoHS standard, 100% recyclable
- Green lighting, environment-friendly
- Brightness decay <2% at 3000 hours
- Temp -15° to 50° & humidity 20% to 80%
- Aluminium body inside, excellent heat dissipation



Items	Materials	Voltage	Lumen	Dimension (MM)(DxH)
BL3960283505-H09	Plastic with Aluminum inside	175-250V	420Lm	39x68
BL3960283506-H09	Plastic with Aluminum inside	175-250V	450Lm	50x88
BL3960283509-H09	Plastic with Aluminum inside	175-250V	680Lm	63x102