




SUNRISE(HK) INTERNATIONAL CORP LTD

LED DOWN LIGHT

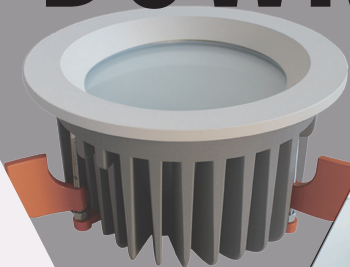


RoHS CE    



www.ledskylight.com



AW-TD055A



AW-TD055B



AW-TD055C



Item:	AW-TD055-2.5F	AW-TD055-3F	AW-TD055-3.5F	AW-TD055-4F	AW-TD055-5F	AW-TD055-6F	AW-TD055-8F
DIA A:	Φ98*31	Φ108*31	Φ118*31.5	Φ138*32	Φ180*36	Φ190*36	Φ242*40
B:	Φ98*36	Φ108*36	Φ118*37	Φ138*38.5	Φ180*43.5	Φ190*45	Φ242*56
C:	Φ98*36	Φ108*36	Φ118*37	Φ138*38.5	Φ180*43.5	Φ190*45	Φ242*56
CUT HOLE:	Φ70	Φ80	Φ90	Φ110	Φ145	Φ155	Φ210
Power:	3W	5W	7W	9W	12W	20W	30W
LED QTY:	18*0.2W (6 P 3 S)	30*0.2W (6 P 5 S)	42*0.2W (6 P 7 S)	54*0.2W (6 P 9 S)	72*0.2W (6 P 12 S)	120*0.2W (10 P 12 S)	180*0.2W (15 P 12 S)
Input:	100-240V 50-60HZ						
Light Source:	2835						
CTT:	3000K/4000K/5000K/6000K						
Working TEMP.:	- 20° C - + 50° C						
CRI:	≥80						
Material:	ADC12 ALUMINUM / 6063ALUMINUM						



AW-TD056A



AW-TD056B



AW-TD056C




Item:	AW-TD056-2.5F	AW-TD056-3F	AW-TD056-3.5F	AW-TD056-4F	AW-TD056-5F	AW-TD056-6F	AW-TD056-8F
DIA A:	Φ98*31	Φ108*31	Φ118*31.5	Φ138*32	Φ180*36	Φ190*36	Φ242*40
B:	Φ98*36	Φ108*36	Φ118*37	Φ138*38.5	Φ180*43.5	Φ190*45	Φ242*56
C:	Φ98*36	Φ108*36	Φ118*37	Φ138*38.5	Φ180*43.5	Φ190*45	Φ242*56
CUT HOLE:	Φ70	Φ80	Φ90	Φ110	Φ145	Φ155	Φ210
Power:	3W	5W	7W	9W	15W	20W	30W
LED QTY:	1*3W	1*5W	1*7W	1*9W	1*15W	1*20W	1*30W
Input:	100-240V						
Light Source:	(CITIZEN) COB						
CTT:	3000K/4000K/5000K/6000K						
Working TEMP.:	- 20° C - + 50° C						
CRI:	≥80						
Material:	ADC12 ALUMINUM / 6063ALUMINUM						




Item:	AW-SD002-2.5F	AW-SD002-4F	AW-SD002-5F	AW-SD002-6F
DIA A:	Φ 85*78	Φ 130*110	Φ 165*143	Φ 190*155
CUT HOLE:	Φ 76	Φ 120	Φ 155	Φ 170
Power:	7W	15W	30W	40W
LED:	1*7W	1*15W	1*30W	1*40W
Lumen:	520LM	1240LM	2650LM	3300LM
Packing:	48	27	12	12
Beam angle:	24° / 60°		24° / 38° / 60°	
Input:	AC100-240V 50/60HZ			
Light Source:	(CREE) COB			
CTT:	3000K/5000K			
Working TEMP.:	- 20° C - +50° C			
CRI:	≥ 80			
Material:	ADC12 (Aluminum die casting)			


IP:54



TD053A



TD053B



Item:	AW-TD053-3F	AW-TD053-4F	AW-TD053-5F	AW-TD053-6F	AW-TD053-8F
DIA A:	Φ110*61	Φ135*69	Φ160*75	Φ185*100	Φ240*120
CUT HOLE:	Φ95	Φ110	Φ130	Φ165	Φ205
Power:	10W	15W	25W	40W	60W
LED Qty A:	12*1W (2 P 6 S)	24*1W (4 P 6 S)	36*1W (6 P 6 S)	60*1W (10 P 6 S)	84*1W (14 P 6 S)
B:	1*10W	1*15W	1*25W	1*40W	1*60W
Lumen A:	650LM	1030LM	1870LM	2650LM	4200LM
B:	850LM	1300LM	2200LM	3200LM	4400LM
Packing:	20	30	18	8	4
Input:	AC100-240V 50/60HZ				
Light Source:	3030 / COB				
Beam angle:	A : 110° B : 50°				
CTT:	3000K/6000K				
Working TEMP.:	- 20° C - + 50° C				
CRI:	> 80				
Material:	Aluminum die casting				



Item:	AW-TD021A/B-4F	AW-TD021A/B-6F	AW-TD021A/B-8F
DIA:	140*140*57	180*180*67	220*220*67
CUT HOLE:	125*125	160*160	195*195
Power:	12W	20W	30W
LED Qty A:	72*0.2W (6 P12 S)	120*0.2W (10 P12 S)	180*0.2W (15 P12 S)
B:	1*12W	1*20W	1*30W
Lumen:	740LM	1460LM	1950LM
Packing:	20	20	10
Input:	AC100-240V 50/60HZ		
Light Source:	SMD 2835		
CTT:	3000K/6000K		
Working TEMP.:	-20° C ~ +50° C		
CRI:	>80 (3000K), >70 (6000K)		
Material:	(Aluminum die casting)+PC		



Item:	AW-TD027-3F	AW-TD027-4F	AW-TD027-5F	AW-TD027-6F	AW-TD027-8F
DIA:	Φ108*51	Φ137*51	Φ157*51.5	Φ195*52.5	Φ295*52.5
CUT HOLE:	Φ95	Φ125	Φ140	Φ170	Φ210
Power:	5W	9W	15W	20W	25W
LED Qty:	30*0.2W (6 P5 S)	54*0.2W (6 P9 S)	84*0.2W (7 P12 S)	120*0.2W (10 P12 S)	144*0.2W (12 P12 S)
Lumen:	430LM	830LM	1300LM	1540LM	2260LM
Packing:	50	20	30	20	20
Input:	AC100-240V 50/60HZ				
Light Source:	SMD 2835				
CTT:	3000K/6000K				
Working TEMP.:	-20° C ~ +50° C				
CRI:	>80 (3000K), >70 (6000K)				
Material:	(Aluminum die casting)+PC				



Item:	AW-TD022A/B-4F	AW-TD022A/B-6F	AW-TD022A/B-8F
DIA:	Φ145*63	Φ196*63	Φ242*63
CUT HOLE:	Φ125	Φ170	Φ210
Power:	12W	20W	30W
LED Qty A:	72*0.2W (6 P12 S)	120*0.2W (10 P12 S)	180*0.2W (15 P12 S)
B:	1*12W	1*20W	1*30W
Lumen:	740LM	1460LM	1950LM
Packing:	20	20	10
Input:	AC100-240V 50/60HZ		
Light Source:	SMD 2835		
CTT:	3000K/6000K		
Working TEMP.:	-20° C ~ +50° C		
CRI:	>80 (3000K), >70 (6000K)		
Material:	(Aluminum die casting)+PC		



Item:	AW-TD028-3F	AW-TD028-4F	AW-TD028-5F	AW-TD028-6F	AW-TD028-8F
DIA:	100*100*51	130*130*51	160*160*51.5	185*185*52.5	230*230*52.5
CUT HOLE:	Φ90	Φ125	Φ140	Φ175	Φ210
Power:	7W	9W	15W	20W	25W
LED Qty:	30*0.2W (6 P5 S)	54*0.2W (6 P9 S)	84*0.2W (7 P12 S)	120*0.2W (10 P12 S)	144*0.2W (12 P12 S)
Lumen:	430LM	830LM	1300LM	1540LM	2260LM
Packing:	50	20	30	20	20
Input:	AC100-240V 50/60HZ				
Light Source:	SMD 2835				
CTT:	3000K/6000K				
Working TEMP.:	-20° C ~ +50° C				
CRI:	>80 (3000K), >70 (6000K)				
Material:	(Aluminum die casting)+PC				



Item:	AW-TD026-3F	AW-TD026-4F	AW-TD026-5F	AW-TD026-6F	AW-TD026-8F
DIA:	Φ107*29	Φ145*29	Φ164*29	Φ199*29	Φ245*29
CUT HOLE:	Φ93	Φ125	Φ140	Φ160	Φ210
Power:	5W	9W	12W	15W	20W
LED Qty:	30*0.2W (6 P5 S)	54*0.2W (6 P9 S)	72*0.2W (7 P12 S)	84*0.2W (7 P12 S)	120*0.2W (10 P12 S)
Lumen:	450LM	780LM	1050LM	1250LM	1670LM
Packing:	50	40	30	20	20
Input:	AC100-240V 50/60HZ				
Light Source:	SMD 2835				
CTT:	3000K/6000K				
Working TEMP.:	-20° C ~ +50° C				
CRI:	>80 (3000K), >70 (6000K)				
Material:	(Aluminum die casting)+PC				



Item:	AW-TD029-3F	AW-TD029-4F	AW-TD029-5F	AW-TD029-6F	AW-TD029-8F
DIA:	100*100*52	140*140*52	150*150*52	170*170*52	210*210*52
CUT HOLE:	95*95	130*130	140*140	160*160	190*190
Power:	5W	9W	15W	20W	25W
LED Qty:	30*0.2W (6 P5 S)	54*0.2W (6 P9 S)	84*0.2W (7 P12 S)	120*0.2W (10 P12 S)	144*0.2W (12 P12 S)
Lumen:	350LM	630LM	1050LM	1270LM	1900LM
Packing:	50	20	30	20	20
Input:	AC100-240V 50/60HZ				
Light Source:	SMD 2835				
CTT:	3000K/6000K				
Working TEMP.:	-20° C ~ +50° C				
CRI:	>80 (3000K), >70 (6000K)				
Material:	(Die-casting magnesium alloys)				



Item:	AW-TD030A/B-3F	AW-TD030A/B-4F	AW-TD030A/B-5F	AW-TD030A/B-6F
DIA A:	Φ110*71	Φ140*86	Φ160*96.5	Φ170*115
B:	Φ115*84	Φ145*101.5	Φ170*114.5	Φ190*131.5
CUT HOLE A:	Φ95	Φ115	Φ135	Φ145
B:	Φ95	Φ120	Φ140	Φ155
Power:	9W	15W	25W	37W
Lumen:	680LM	920LM	1580LM	2330LM
Packing:	50	30	20	20
Beam angle:	24° / 60°			
Input:	AC100-240V 50/60HZ			
Light Source:	(CITIZEN) COB			
CTT:	3000K/6000K			
Working TEMP.:	-20° C - +50° C			
CRI:	> 80 (3000K), > 70 (6000K)			
Material:	(Aluminum die casting)			



Item:	AW-TD033-3F	AW-TD033-4F	AW-TD033-5F	AW-TD033-6F	AW-TD033-8F	AW-TD033-10F
DIA :	Φ108*52	Φ142*65	Φ158*75	Φ185*88	Φ226*108	Φ282*130
CUT HOLE:	Φ95	Φ125	Φ140	Φ170	Φ210	Φ265
Power:	9W	15W	20W	25W	30W	40W
LED Qty A:	54*0.2W(6 P12 S)	84*0.2W (7 P12 S)	120*0.2W (10 P12 S)	144*0.2W(12 P12 S)	180*0.2W(15 P12 S)	240*0.2W(20 P12 S)
B:	1*9W	1*15W	1*20W	1*25W	1*30W	1*40W
Lumen A:	430LM	730LM	1480LM	1900LM	2200LM	3865LM
B:	696LM	1155LM	1545LM	2330LM	3150LM	4560LM
Packing:	50	30	30	20	8	8
Beam angle:	60°					
Input:	AC100-240V 50/60HZ					
Light Source:	A SMD 5630, B (CITIZEN) COB					
CTT:	3000K/6000K					
Working TEMP.:	-20° C - +50° C					
CRI:	> 80 (3000K), > 70 (6000K)					
Material:	(Die-casting magnesium alloys)					



Item:	AW-TD031A/B-3F	AW-TD031A/B-4F	AW-TD031A/B-5F	AW-TD031A/B-6F
DIA A:	110*110*71	140*140*86	160*160*96.5	180*180*111.5
B:	115*115*84	145*145*101.5	170*170*114.5	190*190*131.5
CUT HOLE A:	Φ95	Φ115	Φ135	Φ145
B:	90*95	120*115	140*135	155*150
Power:	9W	15W	25W	37W
Lumen:	680LM	920LM	1580LM	2330LM
Packing:	50	30	20	20
Beam angle:	24° / 60°			
Input:	AC100-240V 50/60HZ			
Light Source:	(CITIZEN) COB CREE			
CTT:	3000K/6000K			
Working TEMP.:	-20° C - +50° C			
CRI:	> 80 (3000K), > 70 (6000K)			
Material:	(Aluminum die casting)			



Item:	AW-TD035A/B-4F	AW-TD035A/B-6F	AW-TD035A/B-8F
DIA :	140*140*57	180*180*67	220*220*67
CUT HOLE:	125*125	160*160	195*195
Power:	12W	20W	30W
LED Qty A:	72*0.2W(6 P12 S)	120*0.2W (10 P12 S)	180*0.2W (15 P12 S)
B:	1*12W	1*20W	1*30W
Lumen :	740LM	1300LM	1950LM
Packing:	20	20	10
Input:	AC100-240V 50/60HZ		
Light Source:	COB, 2835		
CTT:	3000K/6000K		
Working TEMP.:	-20° C - +50° C		
CRI:	> 80 (3000K), > 70 (6000K)		
Material:	(Aluminum die casting)		



Item:	AW-TD032A/B-3F	AW-TD032A/B-4F
DIA A:	205*110*71	260*140*86
B:	210*115*84	265*145*101.5
CUT HOLE A:	180*90	230*115
B:	190*95	240*125
Power:	2*9W	2*15W
Lumen:	960LM	1600LM
Packing:	20	20
Beam angle:	24° / 60°	
Input:	AC100-240V 50/60HZ	
Light Source:	(CITIZEN) COB CREE	
CTT:	3000K/6000K	
Working TEMP.:	-20° C - +50° C	
CRI:	> 80 (3000K), > 70 (6000K)	
Material:	(Aluminum die casting)	



Item:	AW-TD036A/B-4F	AW-TD036A/B-6F	AW-TD036A/B-8F
DIA :	Φ145*63	Φ196*63	Φ242*63
CUT HOLE:	Φ125	Φ170	Φ210
Power:	12W	20W	30W
LED Qty A:	72*0.2W(6 P12 S)	120*0.2W (10 P12 S)	180*0.2W (15 P12 S)
B:	1*12W	1*20W	1*30W
Lumen:	740LM	1460LM	1950LM
Packing:	20	20	10
Input:	AC100-240V 50/60HZ		
Light Source:	COB, 2835		
CTT:	3000K/6000K		
Working TEMP.:	-20° C - +50° C		
CRI:	> 80 (3000K), > 70 (6000K)		
Material:	(Aluminum die casting)		



Item:	AW-TD038-3F	AW-TD038-4F	AW-TD038-5F	AW-TD038-6F	AW-TD038-8F	AW-TD038-10F
DIA :	Φ100*36.5	Φ135*43.5	Φ150*48.5	Φ180*48.5	Φ215*53	Φ280*53
CUT HOLE:	Φ90	Φ125	Φ140	Φ170	Φ200	Φ260
Power:	5W	9W	12W	15W	25W	40W
LED Qty:	30*0.2W (6 P12 S)	54*0.2W (6 P9 S)	72*0.2W (6 P12 S)	84*0.2W (7 P12 S)	144*0.2W (12 P12 S)	240*0.2W (30 P12 S)
Lumen:	370LM	725LM	975LM	1335LM	1555LM	2560LM
Packing:	50	40	30	10	10	10
Input:	AC100-240V 50/60HZ					
Light Source:	SMD 2835					
CTT:	3000K/6000K					
Working TEMP. :	-20° C - +50° C					
CRI:	>80(3000K). >70(6000K)					
Material:	(Aluminum die casting)					



Item:	AW-TD039-3F	AW-TD039-4F	AW-TD039-5F	AW-TD039-6F	AW-TD039-8F	AW-TD039-10F
DIA :	Φ100*31.5	Φ135*61.5	Φ150*68.5	Φ180*70.5	Φ215*78.5	Φ280*83
CUT HOLE:	Φ90	Φ125	Φ140	Φ170	Φ200	Φ260
Power:	5W	9W	12W	15W	25W	40W
LED Qty:	30*0.2W (6 P12 S)	54*0.2W (6 P9 S)	72*0.2W (6 P12 S)	84*0.2W (7 P12 S)	144*0.2W (12 P12 S)	240*0.2W (30 P12 S)
Lumen:	370LM	725LM	975LM	1335LM	1555LM	2560LM
Packing:	50	20	30	10	10	10
Input:	AC100-240V 50/60HZ					
Light Source:	SMD 2835					
CTT:	3000K/6000K					
Working TEMP. :	-20° C - +50° C					
CRI:	>80(3000K). >70(6000K)					
Material:	(Aluminum die casting)					



Item:	AW-TD040-3F	AW-TD040-4F	AW-TD040-5F	AW-TD040-6F	AW-TD040-8F	AW-TD040-10F
DIA :	100*100*51.5	135*135*61.5	150*150*68.5	180*180*70.5	210*210*78.5	280*280*83
CUT HOLE:	Φ90	Φ125	Φ140	Φ170	Φ200	Φ260
Power:	5W	9W	12W	15W	25W	40W
LED Qty:	30*0.2W (6 P12 S)	54*0.2W (6 P9 S)	72*0.2W (6 P12 S)	84*0.2W (7 P12 S)	144*0.2W (12 P12 S)	240*0.2W (30 P12 S)
Lumen:	370LM	725LM	975LM	1335LM	1555LM	2560LM
Packing:	50	20	30	10	10	10
Input:	AC100-240V 50/60HZ					
Light Source:	SMD 2835					
CTT:	3000K/6000K					
Working TEMP. :	-20° C - +50° C					
CRI:	>80(3000K). >70(6000K)					
Material:	(Aluminum die casting)					




Item:	AW-TD041-3F	AW-TD041-4F	AW-TD041-5F	AW-TD041-6F
DIA :	Φ105*90.5	Φ139*110.5	Φ162*125.5	Φ185*145
CUT HOLE:	Φ95	Φ125	Φ140	Φ170
Power:	9W	15W	25W	37W
LED Qty:	1*9W	1*15W	1*25W	1*37W
Lumen:	785LM	950LM	1940LM	2120LM
Packing:	50	30	16	12
Beam angle:	24° /60°			
Input:	AC100-240V 50/60HZ			
Light Source:	(CITIZEN) COB			
CTT:	3000K/6000K			
Working TEMP. :	-20° C - +50° C			
CRI:	>80(3000K). >70(6000K)			
Material:	(Aluminum die casting)			

TD042A



Item:	AW-TD042A/B/C-4F	AW-TD042A/B/C-6F	AW-TD042A/B/C-8F
DIA :	Φ140*88	Φ181*92	Φ226*108
CUT HOLE:	Φ130	Φ165	Φ210
Power:	12W	20W	30W
LED Qty A:	72*0.2W (6 P12 S)	120*0.2W (10 P12 S)	180*0.2W (15 P12 S)
B:	1*12W	1*20W	1*30W
Lumen A:	740LM	1045LM	1815LM
B:	840LM	1400LM	2100LM
Packing:	30	20	8
Beam angle:	60°		
Input:	AC100-240V 50/60HZ		
Light Source:	(Citizen) , 2835		
CTT:	3000K/6000K		
Working TEMP. :	-20° C - +50° C		
CRI:	>80(3000K). >70(6000K)		
Material:	(Aluminum die casting)		

TD043A



Item:	AW-TD043A/B/C-4F	AW-TD043A/B/C-6F	AW-TD043A/B/C-8F
DIA :	140*88	181*92	226*108
CUT HOLE:	Φ130	Φ165	Φ210
Power:	12W	20W	30W
LED Qty A:	72*0.2W (6 P12 S)	120*0.2W (10 P12 S)	180*0.2W (15 P12 S)
B:	1*12W	1*20W	1*30W
Lumen A:	740LM	1300LM	1950LM
B:	840LM	1400LM	2100LM
Packing:	30	20	8
Beam angle:	60°		
Input:	AC100-240V 50/60HZ		
Light Source:	(Citizen) , 2835		
CTT:	3000K/6000K		
Working TEMP. :	-20° C - +50° C		
CRI:	>80(3000K). >70(6000K)		
Material:	(Aluminum die casting)		



Item:	AW-TD046-3F	AW-TD046-4F	AW-TD046-5F	AW-TD046-6F	AW-TD046-8F
DIA :	104*104*38	138*138*39	153*153*39	186.5*186.5*39	228*228*38.6
CUT HOLE:	90*90	125*125	140*140	170*170	210*210
Power:	7W	12W	20W	30W	40W
LED Qty:	42*0.2W(6P12S)	72*0.2W(6P12S)	120*0.2W(10P12S)	180*0.2W(15P12S)	240*0.2W(20P12S)
Lumen:	470LM	825LM	1500LM	2280LM	2935LM
Packing:	50	30	30	30	10
Input:	AC100-240V 50/60HZ				
Light Source:	SMD 2835				
CTT:	3000K/6000K				
Working TEMP. :	-20° C - +50° C				
CRI:	> 80(3000K), > 70(6000K)				
Material:	(Aluminum die casting)+PC				



Item:	AW-TDS030A/B-3F	AW-TDS030A/B-4F	AW-TDS030A/B-5F	AW-TDS030A/B-6F
DIA A:	Φ110*71	Φ140*86	Φ160*96.5	Φ170*115
B:	Φ115*84	Φ145*101.5	Φ170*114.5	Φ190*131.5
CUT HOLE A:	Φ95	Φ115	Φ135	Φ145
B:	Φ95	Φ120	Φ140	Φ155
Power:	9W	15W	25W	37W
Lumen:	680LM	920LM	1580LM	2330LM
Packing:	50	30	20	20
Beam angle:	15° /24° /30°			
Input:	AC100-240V 50/60HZ			
Light Source:	(CREE). (CITIZEN) COB			
CTT:	3000K/6000K			
Working TEMP. :	-20° C - +50° C			
CRI:	> 80(3000K), > 70(6000K)			
Material:	(Aluminum die casting)			



Item:	AW-TD050-8F
DIA :	Φ230*205
CUT HOLE:	Φ205
Power:	60W
LED Qty:	1*60W
Lumen:	3870LM
Packing:	6
Beam angle:	36°
Input:	AC100-240V 50/60HZ
Light Source:	(CREE) COB
CTT:	3000K/5000K
Working TEMP. :	-20° C - +50° C
CRI:	> 80(3000K), > 70(6000K)
Material:	(Aluminum die casting)




Item:	AW-TDS031A/B-3F	AW-TDS031A/B-4F	AW-TDS031A/B-5F	AW-TDS031A/B-6F
DIA A:	110*110*71	140*140*86	160*160*96.5	180*180*111.5
B:	115*115*84	145*145*101.5	170*170*114.5	190*190*131.5
CUT HOLE A:	Φ95	Φ115	Φ135	Φ145
B:	90*95	120*115	140*135	155*150
Power:	9W	15W	25W	37W
Lumen:	680LM	920LM	1580LM	2330LM
Packing:	50	30	20	20
Beam angle:	15° /24° /30°			
Input:	AC100-240V 50/60HZ			
Light Source:	(CREE). (CITIZEN) COB			
CTT:	3000K/6000K			
Working TEMP. :	-20° C - +50° C			
CRI:	> 80(3000K), > 70(6000K)			
Material:	(Aluminum die casting)			



Item:	AW-TD041-3F	AW-TD041-4F	AW-TD041-5F	AW-TD041-6F
DIA :	Φ105*90.5	Φ139*110.5	Φ162*125.5	Φ185*145
CUT HOLE:	Φ95	Φ125	Φ140	Φ170
Power:	9W	15W	25W	37W
LED Qty:	1*9W	1*15W	1*25W	1*37W
Lumen:	785LM	950LM	1940LM	2120LM
Packing:	30	20	20	12
Beam angle:	24° /60°			
Input:	AC100-240V 50/60HZ			
Light Source:	(CREE). (CITIZEN) COB			
CTT:	3000K/6000K			
Working TEMP. :	-20° C - +50° C			
CRI:	> 80(3000K), > 70(6000K)			
Material:	(Aluminum die casting)			



Item:	AW-TDS032A/B-3F	AW-TDS032A/B-4F
DIA A:	205*110*71	260*140*86
B:	210*115*84	265*145*101.5
CUT HOLE A:	180*90	230*115
B:	190*95	240*125
Power:	9W*2	15W*2
Lumen:	960LM	1600LM
Packing:	20	20
Beam angle:	15° /24° /30°	
Input:	AC100-240V 50/60HZ	
Light Source:	(CREE). (CITIZEN) COB	
CTT:	3000K/6000K	
Working TEMP. :	-20° C - +50° C	
CRI:	> 80(3000K), > 70(6000K)	
Material:	(Aluminum die casting)	





Item:	AW-TD051-2.5F	AW-TD051-3F	AW-TD051-4F	AW-TD051-5F	AW-TD051-6F	AW-TD051-8F
DIA:	Φ89.7*56	Φ110*68	Φ137.5*82	Φ165*91	Φ195*107	Φ235*127.5
CUT HOLE:	Φ75	Φ90	Φ120	Φ140	Φ170	Φ200
Power:	5W	9W	15W	20W	30W	40W
LED Qty:	1*5W	1*9W	1*15W	1*20W	1*30W	1*40W
Lumen:	405.3LM	685.2LM	1058.5LM	1326.6LM	1994.6LM	2621.8LM
Packing:	48	48	24	18	18	12
Beam angle:	60°					
Input:	AC100-240V 50/60HZ					
Light Source:	(Citizen) COB					
CTT:	3000K/6000K					
Working TEMP.:	-20° C ~ +50° C					
CRI:	>80(3000K). >70(6000K)					
Material:	(Aluminum die casting)+PC					



Item:	AW-TD052-2.5F	AW-TD052-3F	AW-TD052-4F	AW-TD052-5F	AW-TD052-6F	AW-TD052-8F
DIA:	Φ89.7*56	Φ110*68	Φ137.5*82	Φ165*91	Φ195*107	Φ235*127.5
CUT HOLE:	Φ75	Φ90	Φ120	Φ135	Φ170	Φ200
Power:	6W	9W	15W	25W	30W	40W
LED Qty:	9*1W(3 P3S)	12*1W (2 P6S)	24*1W (4 P6S)	36*1W (6 P6S)	48*1W (8 P6S)	60*1W(10 P6S)
Lumen:	420LM	840LM	1260LM	1750LM	2100LM	2800LM
Packing:	48	48	24	18	18	12
Input:	AC100-240V 50/60HZ					
Light Source:	3030					
CTT:	3000K/6000K					
Working TEMP.:	-20° C ~ +50° C					
CRI:	>80(3000K). >70(6000K)					
Material:	(Aluminum die casting)+PC					



Item:	AW-TSD0301	AW-TSD0302	AW-TSD0303	AW-TSD0304
DIA:	Φ48*36.5	48*48*36.5	Φ55*45	60*60*45
CUT HOLE:	Φ40	Φ40	Φ50	Φ50
Power:	3W	3W	3W	3W
LED :	1*3W	1*3W	1*3W	1*3W
Lumen:	283.8LM	283.8LM	283.8LM	283.8LM
Packing:	100	100	100	100
Beam angle:	AC100-240V 50/60HZ			
Input:	(CITIZEN) COB			
Light Source:	3000K/5000K			
CTT:	24°			
Working TEMP.:	>80(3000K). >70(6000K)			
CRI:	-20° C ~ +50° C			
Material:	(Aluminum die casting)			



Item:	AW-MD001A/B-2.5F	AW-MD001A/B-3F	AW-MD001A/B-4F	AW-MD001A/B-5F	AW-MD001A/B-6F
DIA A:	Φ68*75	Φ87*75	Φ108*90	Φ128*105	Φ148*120
B:	Φ68*88	Φ88*87	Φ108*107	Φ128*128	Φ148*148
Power:	5W	7W	12W	15W	20W
LED Qty:	30*0.2W(6 P3S)	42*0.2W (6 P7S)	72*0.2W (6 P12S)	84*0.2W (7 P12S)	120*0.2W (10 P12S)
Lumen A:	375LM	525LM	768LM	900LM	1565LM
B:	260LM	470LM	560LM	720LM	780LM
Packing:	30	30	24	12	12
Input:	AC100-240V 50/60HZ				
Light Source:	SMD 2835				
CTT:	3000K/6000K				
Working TEMP.:	-20° C ~ +50° C				
CRI:	>80(3000K). >70(6000K)				
Material:	6063				



Item:	AW-MD003A/B-6F	AW-MD003A/B-8F
DIA A:	Φ195*243	Φ230*287
Power:	25W	40W
LED Qty A:	36*1W(6 P6S)	60*1W(10 P6S)
B:	1*25W	1*40W
Lumen A:	1800LM	2530LM
B:	2150LM	3100LM
Packing:	4	2
Input:	AC100-240V 50/60HZ	
Light Source:	3030, COB	
Beam angle:	A 110° B : 50°	
CTT:	3000K/6000K	
Working TEMP.:	-20° C ~ +50° C	
CRI:	>80	
Material:	(Aluminum) + (Cold rolled plate)	



Item:	AW-DD001-1-140	AW-DD001-1-160	AW-DD001-1-190	AW-DD001-1-203
DIA:	140*140*143.5	160*160*163	190*190*172.5	203*203*187.5
CUT HOLE :	125*125	145*145	170*170	185*185
Power:	9W	15W	25W	37W
LED:	1*9W	1*15W	1*25W	1*37W
Lumen:	680LM	920LM	1580LM	2330LM
Packing:	16	16	6	8
Input:	AC100-240V 50/60HZ			
Light Source:	(CITIZEN) COB			
CTT:	3000K/5000K			
Beam angle:	24° /60°			
Working TEMP. :	-20° C - +50° C			
CRI:	> 80(3000K), > 70(6000K)			
Material:	(Aluminum)+ (Iron)			



Item:	AW-DDS001-1-140	AW-DDS001-1-160	AW-DDS001-1-190	AW-DDS001-1-203
DIA:	140*140*143.5	160*160*163	190*190*172.5	203*203*187.5
CUT HOLE :	125*125	145*145	170*170	185*185
Power:	9W	15W	25W	37W
LED:	1*9W	1*15W	1*25W	1*37W
Lumen:	680LM	920LM	1580LM	2330LM
Packing:	16	16	6	8
Input:	AC100-240V 50/60HZ			
Light Source:	(CREE), (CITIZEN) COB			
CTT:	3000K/5000K			
Beam angle:	15° /24° /30°			
Working TEMP. :	-20° C - +50° C			
CRI:	> 80(3000K), > 70(6000K)			
Material:	(Aluminum)+ (Iron)			



Item:	AW-DD001-2-140	AW-DD001-2-160	AW-DD001-2-190	AW-DD001-2-203
DIA:	260*140*143.5	320*160*163	375*190*172.5	405*203*187.5
CUT HOLE :	245*125	305*145	355*170	405*185
Power:	20W	30W	58W	74W
LED:	2*9W	2*15W	2*25W	2*37W
Lumen:	1210LM	1430LM	2590LM	3860LM
Packing:	8	8	6	4
Input:	AC100-240V 50/60HZ			
Light Source:	(CITIZEN) COB			
CTT:	3000K/5000K			
Beam angle:	24° /60°			
Working TEMP. :	-20° C - +50° C			
CRI:	> 80(3000K), > 70(6000K)			
Material:	(Aluminum)+ (Iron)			



Item:	AW-DDS001-2-140	AW-DDS001-2-160	AW-DDS001-2-190	AW-DDS001-2-203
DIA:	260*140*143.5	320*160*163	375*190*172.5	405*203*187.5
CUT HOLE :	245*125	305*145	355*170	405*185
Power:	20W	30W	50W	74W
LED:	2*9W	2*15W	2*25W	2*37W
Lumen:	1210LM	1430LM	2590LM	3860LM
Packing:	8	8	6	4
Input:	AC100-240V 50/60HZ			
Light Source:	(CREE), (CITIZEN) COB			
CTT:	3000K/5000K			
Beam angle:	15° /24° /30°			
Working TEMP. :	-20° C - +50° C			
CRI:	> 80(3000K), > 70(6000K)			
Material:	(Aluminum)+ (Iron)			



Item:	AW-DD001-3-140	AW-DD001-3-160	AW-DD001-3-190
DIA:	372*140*143.5	462*160*163	538*190*172.5
CUT HOLE :	360*125	450*145	520*170
Power:	27W	45W	75W
LED:	3*9W	3*15W	3*25W
Lumen:	1400LM	2020LM	3630LM
Packing:	6	6	4
Input:	AC100-240V 50/60HZ		
Light Source:	(CITIZEN) COB		
CTT:	3000K/5000K		
Beam angle:	24° /60°		
Working TEMP. :	-20° C - +50° C		
CRI:	> 80(3000K), > 70(6000K)		
Material:	(Aluminum)+ (Iron)		



Item:	AW-DD001-3-140	AW-DD001-3-160	AW-DD001-3-190
DIA:	372*140*143.5	462*160*163	538*190*172.5
CUT HOLE :	360*125	450*145	520*170
Power:	27W	45W	75W
LED:	3*9W	3*15W	3*25W
Lumen:	1400LM	2020LM	3630LM
Packing:	6	6	4
Input:	AC100-240V 50/60HZ		
Light Source:	(CREE), (CITIZEN) COB		
CTT:	3000K/5000K		
Beam angle:	15° /24° /30°		
Working TEMP. :	-20° C - +50° C		
CRI:	> 80(3000K), > 70(6000K)		
Material:	(Aluminum)+ (Iron)		



Item:	AW-TSD0801	AW-TSD1201	AW-TSD2001
DIA:	Φ86*77	Φ109*100	Φ148*135
CUT HOLE :	Φ70	Φ90	Φ115
Power:	8W	12W	20W
LED:	1*8W	1*12W	1*20W
Lumen:	560LM	810LM	1200LM
Packing:	48	36	18
Input:	AC100-240V 50/60HZ		
Light Source:	(CITIZEN) / (CREE) / (EPISTAR)		
CTT:	3000K/5000K		
Beam angle:	15° /24°		
Working TEMP. :	-20° C ~ +50° C		
CRI:	>80		
Material:	(Aluminum die casting)		



Item:	AW-TSD0802	AW-TSD1202	AW-TSD2002
DIA:	Φ99*77	Φ109*100	Φ154*125
CUT HOLE :	Φ75	Φ95	Φ120
Power:	8W	12W	20W
LED Qty:	1*8W	1*12W	1*20W
Lumen:	560LM	810LM	1200LM
Packing:	48	36	18
Input:	AC100-240V 50/60HZ		
Light Source:	(CITIZEN) / (CREE) / (EPISTAR)		
CTT:	3000K/5000K		
Beam angle:	15° /24°		
Working TEMP. :	-20° C ~ +50° C		
CRI:	>80		
Material:	(Aluminum die casting)		



Item:	AW-TSD0803	AW-TSD1203	AW-TSD2003
DIA:	Φ80*90	Φ100*110	Φ135*145
CUT HOLE :	Φ70	Φ90	Φ115
Power:	8W	12W	20W
LED Qty:	1*8W	1*12W	1*20W
Lumen:	540LM	890LM	1200LM
Packing:	50	36	18
Input:	AC100-240V 50/60HZ		
Light Source:	(CITIZEN) / (CREE) / (EPISTAR)		
CTT:	3000K/5000K		
Beam angle:	15° /24°		
Working TEMP. :	-20° C ~ +50° C		
CRI:	>80		
Material:	(Aluminum die casting)		



Item:	AW-TSD0804	AW-TSD1204	AW-TSD2004
DIA:	80*80*90	100*100*110	135*135*145
CUT HOLE :	Φ70	Φ90	Φ115
Power:	8W	12W	20W
LED:	1*8W	1*12W	1*20W
Lumen:	490LM	930LM	1200LM
Packing:	48	36	18
Input:	AC100-240V 50/60HZ		
Light Source:	(CITIZEN) / (CREE) / (EPISTAR)		
CTT:	3000K/5000K		
Beam angle:	15° /24°		
Working TEMP. :	-20° C ~ +50° C		
CRI:	>80		
Material:	(Aluminum die casting)		



Item:	AW-TSD0805	AW-TSD1205	AW-TSD2005
DIA:	Φ85*65	Φ110*85	Φ135*82
CUT HOLE :	Φ75	Φ95	Φ120
Power:	8W	12W	20W
LED:	1*8W	1*12W	1*20W
Lumen:	560LM	870LM	1200LM
Packing:	48	36	18
Input:	AC100-240V 50/60HZ		
Light Source:	(CITIZEN) / (CREE) / (EPISTAR)		
CTT:	3000K/5000K		
Beam angle:	15° /24°		
Working TEMP. :	-20° C ~ +50° C		
CRI:	>80		
Material:	(Aluminum die casting)		



Item:	AW-TSD0806	AW-TSD1206	AW-TSD2006
DIA:	85*85*65	110*110*85	145*145*82
CUT HOLE :	Φ75	Φ95	Φ125
Power:	8W	12W	20W
LED:	1*8W	1*12W	1*20W
Lumen:	560LM	870LM	1200LM
Packing:	48	36	18
Input:	AC100-240V 50/60HZ		
Light Source:	(CITIZEN) / (CREE) / (EPISTAR)		
CTT:	3000K/5000K		
Beam angle:	15° /24°		
Working TEMP. :	-20° C ~ +50° C		
CRI:	>80		
Material:	(Aluminum die casting)		



Item:	AW-TSD0807	AW-TSD1207	AW-TSD2007
DIA:	Φ95*98	Φ120*120	Φ145*150
CUT HOLE :	Φ80	Φ102	Φ130
Power:	8W	12W	20W
LED:	1*8W	1*12W	1*20W
Lumen:	470LM	780LM	1200LM
Packing:	48	36	18
Input:	AC100-240V 50/60HZ		
Light Source:	(CITIZEN) / (CREE) / (EPISTAR)		
CTT:	3000K/4000K/5000K		
Beam angle:	15° /24° /30°		
Working TEMP. :	-20° C ~ +50° C		
CRI:	>80		
Material:	(Aluminum die casting)		



Item:	AW-TSD0808	AW-TSD1208
DIA:	95*95*94	115*115*120
CUT HOLE :	80*80	100*100
Power:	8W	12W
LED:	1*8W	1*12W
Lumen:	560LM	850LM
Packing:	48	36
Input:	AC100-240V 50/60HZ	
Light Source:	(CITIZEN) / (CREE) / (EPISTAR)	
CTT:	3000K/4000K/5000K	
Beam angle:	15° /24° /30°	
Working TEMP. :	-20° C ~ +50° C	
CRI:	>80	
Material:	(Aluminum die casting)	



Item:	AW-TSD0809	AW-TSD1209
DIA:	95*95*95	115*115*120
CUT HOLE :	82*82	105*105
Power:	8W	12W
LED:	1*8W	1*12W
Lumen:	560LM	850LM
Packing:	48	36
Input:	AC100-240V 50/60HZ	
Light Source:	(CITIZEN) / (CREE) / (EPISTAR)	
CTT:	3000K/4000K/5000K	
Beam angle:	15° /24° /30°	
Working TEMP. :	-20° C ~ +50° C	
CRI:	>80(3000K), >70(6000K)	
Material:	(Aluminum die casting)	



Item:	AW-TSD0810	AW-TSD1210
DIA:	Φ100*96	Φ125*117
CUT HOLE :	Φ90	Φ115
Power:	8W	12W
LED:	1*8W	1*12W
Lumen:	270LM	850LM
Packing:	48	36
Input:	AC100-240V 50/60HZ	
Light Source:	(CITIZEN) / (CREE) / (EPISTAR)	
CTT:	3000K/5000K	
Beam angle:	15° /24° /30°	
Working TEMP. :	-20° C ~ +50° C	
CRI:	>80	
Material:	(Aluminum die casting)	



Item:	AW-TSD0811	AW-TSD1211
DIA:	Φ100*96	Φ125*117
CUT HOLE :	Φ90	Φ115
Power:	8W	12W
LED:	1*8W	1*12W
Lumen:	320LM	590LM
Packing:	48	36
Input:	AC100-240V 50/60HZ	
Light Source:	(CITIZEN) / (CREE) / (EPISTAR)	
CTT:	3000K/5000K	
Beam angle:	15° /24° /30°	
Working TEMP. :	-20° C ~ +50° C	
CRI:	>80	
Material:	(Aluminum die casting)	



Item:	AW-TSD0812	AW-TSD1212
DIA:	Φ100*96	Φ125*117
CUT HOLE :	Φ90	Φ115
Power:	8W	12W
LED:	1*8W	1*12W
Lumen:	360LM	530LM
Packing:	48	36
Input:	AC100-240V 50/60HZ	
Light Source:	(CITIZEN) / (CREE) / (EPISTAR)	
CTT:	3000K/5000K	
Beam angle:	15° /24° /30°	
Working TEMP. :	-20° C ~ +50° C	
CRI:	>80(3000K), >70(6000K)	
Material:	(Aluminum die casting)	



Item:	AW-TSD0813	AW-TSD1213
DIA:	Φ100*96	Φ125*117
CUT HOLE :	Φ90	Φ115
Power:	8W	12W
LED:	1*8W	1*12W
Lumen:	430LM	780LM
Packing:	48	36
Input:	AC100-240V 50/60HZ	
Light Source:	(CITIZEN)/ (CREE)/ (EPISTAR)	
CTT:	3000K/4000K/5000K	
Beam angle:	15° /24° /30°	
Working TEMP. :	-20° C - +50° C	
CRI:	>80	
Material:	(Aluminum die casting)	



Item:	AW-TSD0814	AW-TSD1214
DIA:	Φ100*96	Φ125*117
CUT HOLE :	Φ90	Φ115
Power:	8W	12W
LED:	1*8W	1*12W
Lumen:	480LM	740LM
Packing:	48	36
Input:	AC100-240V 50/60HZ	
Light Source:	(CITIZEN)/ (CREE)/ (EPISTAR)	
CTT:	3000K/4000K/5000K	
Beam angle:	15° /24° /30°	
Working TEMP. :	-20° C - +50° C	
CRI:	>80	
Material:	(Aluminum die casting)	



Item:	AW-TSD0815	AW-TSD1215	AW-TSD2015
DIA:	Φ75*65	Φ100*85	Φ130*110
CUT HOLE :	Φ70	Φ90	Φ115
Power:	8W	12W	20W
LED:	1*8W	1*12W	1*20W
Lumen:	575LM	905LM	1200LM
Packing:	48	36	18
Input:	AC100-240V 50/60HZ		
Light Source:	(CITIZEN)/ (CREE)/ (EPISTAR)		
CTT:	3000K/4000K/5000K		
Beam angle:	15° /24° /30°		
Working TEMP. :	-20° C - +50° C		
CRI:	>80		
Material:	(Aluminum die casting)		



Item:	AW-TSD0816	AW-TSD1216	AW-TSD2016
DIA:	75*75*65	100*100*85	135*135*110
CUT HOLE :	Φ70	Φ90	Φ115
Power:	8W	12W	20W
LED:	1*8W	1*12W	1*20W
Lumen:	575LM	905LM	1200LM
Packing:	48	36	18
Input:	AC100-240V 50/60HZ		
Light Source:	(CITIZEN)/ (CREE)/ (EPISTAR)		
CTT:	3000K/4000K/5000K		
Beam angle:	15° /24° /30°		
Working TEMP. :	-20° C - +50° C		
CRI:	>80		
Material:	(Aluminum die casting)		



Item:	AW-TSD0817	AW-TSD1217
DIA:	Φ95*103	Φ125*133
CUT HOLE :	Φ90	Φ115
Power:	8W	12W
LED:	1*8W	1*12W
Lumen:	480LM	720LM
Packing:	48	36
Input:	AC100-240V 50/60HZ	
Light Source:	(CITIZEN)/ (CREE)/ (EPISTAR)	
CTT:	3000K/4000K/5000K	
Beam angle:	15° /24° /30°	
Working TEMP. :	-20° C - +50° C	
CRI:	>80	
Material:	(Aluminum die casting)	



Item:	AW-TSD0818	AW-TSD1218
DIA:	95*95*103	125*125*133
CUT HOLE :	90*90	115*115
Power:	8W	12W
LED:	1*8W	1*12W
Lumen:	480LM	720LM
Packing:	48	36
Input:	AC100-240V 50/60HZ	
Light Source:	(CITIZEN)/ (CREE)/ (EPISTAR)	
CTT:	3000K/4000K/5000K	
Beam angle:	15° /24° /30°	
Working TEMP. :	-20° C - +50° C	
CRI:	>80	
Material:	(Aluminum die casting)	



Item:	AW-GSD0801-1	AW-GSD0802-1	AW-GSD0803-1	AW-GSD1201-1	AW-GSD1202-1	AW-GSD1203-1
DIA:	110*110*92	110*110*92	110*110*96	133*132*110	133*132*115	133*132*121
CUT HOLE :	100*100	100*100	110*110	120*120	120*120	120*120
Power:	8W	8W	8W	12W	12W	12W
LED:	1*8W	1*8W	1*8W	1*12W	1*12W	1*12W
Lumen:	560LM	509LM	390LM	895LM	725LM	511LM
Packing:	30	30	30	20	20	20
Input:	AC100-240V 50/60HZ					
Light Source:	(CITIZEN) COB/ (CREE) COB					
CTT:	3000K/4000K/5000K					
Beam angle:	15° /24° /30°					
Working TEMP. :	- 20° C ~ +50° C					
CRI:	> 80 (3000K) , > 70 (6000K)					
Material:	(Aluminum) + (Iron)					



Item:	AW-GSD0801-2	AW-GSD0802-2	AW-GSD0803-2	AW-GSD1201-2	AW-GSD1202-2	AW-GSD1203-2
DIA:	190*110*92	190*100*92	190*110*96	232*132*110	232*132*115	232*132*121
CUT HOLE :	180*100	180*100	180*100	220*120	220*120	220*120
Power:	16W	16W	16W	24W	24W	24W
LED:	2*8W	2*8W	2*8W	2*12W	2*12W	2*12W
Lumen:	1090LM	843LM	742LM	1410LM	1093LM	960LM
Packing:	18	18	18	12	12	12
Input:	AC100-240V 50/60HZ					
Light Source:	(CITIZEN) COB/ (CREE) COB					
CTT:	3000K/4000K/5000K					
Beam angle:	15° /24° /30°					
Working TEMP. :	- 20° C ~ +50° C					
CRI:	> 80 (3000K) , > 70 (6000K)					
Material:	(Aluminum) + (Iron)					



Item:	AW-GSD0801-3	AW-GSD0802-3	AW-GSD0803-3	AW-GSD1201-3	AW-GSD1202-3	AW-GSD1203-3
DIA:	263.5*110*92	263.5*110*92	263.5*110*96	340*132*110	340*132*115	340*132*121
CUT HOLE :	255*100	255*100	255*100	30*120	330*120	330*120
Power:	24W	24W	24W	36W	36W	36W
LED:	3*8W	3*8W	3*8W	3*12W	3*12W	3*12W
Lumen:	1503LM	1326LM	1030LM	2400LM	2140LM	1680LM
Packing:	12	12	12	8	8	8
Input:	AC100-240V 50/60HZ					
Light Source:	(CITIZEN) COB/ (CREE) COB					
CTT:	3000K/4000K/5000K					
Beam angle:	15° /24° /30°					
Working TEMP. :	- 20° C ~ +50° C					
CRI:	> 80 (3000K) , > 70 (6000K)					
Material:	(Aluminum) + (Iron)					



Item:	AW-GSD0801-4	AW-GSD0802-4	AW-GSD0803-4	AW-GSD1201-4	AW-GSD1202-4	AW-GSD1203-4
DIA:	190*190*92	190*190*92	190*190*96	232*232*110	232*232*115	232*232*121
CUT HOLE :	180*180	180*180	180*180	225*225	220*220	220*220
Power:	32W	32W	32W	48W	48W	48W
LED:	4*8W	4*8W	4*8W	4*12W	4*12W	4*12W
Lumen:	2075LM	1864LM	1411LM	2900LM	2750LM	2050LM
Packing:	12	12	12	8	8	8
Input:	AC100-240V 50/60HZ					
Light Source:	(CITIZEN) COB/ (CREE) COB					
CTT:	3000K/4000K/5000K					
Beam angle:	15° /24° /30°					
Working TEMP. :	- 20° C ~ +50° C					
CRI:	> 80 (3000K) , > 70 (6000K)					
Material:	(Aluminum) + (Iron)					

SUNRISE(HK) INTERNATIONAL CORP LTD

Address:

Room 2209 Metropolitan Heights at Century Place
Zhonghang Road, HuaQiang North Futian District,
Shenzhen, China.

Tel: +86-0755-8271 3147

E-mail: info@linksunrise.com
